


Connection Types

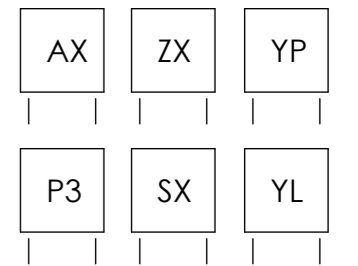

Model	Section	Width W (mm)	Height H (mm)	A Axis Dimension (mm)	D Depth of the Product (mm)	F Tube Width (mm)	E Gap Between Two Tubes (mm)	K Wall to Radiator Front (mm)	L Wall to Radiator Axis Center (mm)	M Wall to Radiator Back (mm)	Heat Output $\Delta T=30\text{ }^{\circ}\text{C}$ (Watt)	Heat Output $\Delta T=50\text{ }^{\circ}\text{C}$ (Watt)	Heat Output $\Delta T=60\text{ }^{\circ}\text{C}$ (Watt)	Heat Output $\Delta T=70\text{ }^{\circ}\text{C}$ (Watt)	BTU/h	Net Weight (kg)	Gross Weight (kg)	Water Volume (l)	Package Volume (m ³)	Package Dimensions H x W x D (mm)
Nish 200	1	200	1600	1545	41	200	4	63-72	35-44	22-31	98	254	331	397	1353	4,84	6,44	0,34	0,04	1710X235X76
	1	200	1800	1745	41	200	4	63-72	35-44	22-31	113	292	380	456	1554	5,38	7,27	0,37	0,04	1910X235X76
Nish 404	2	404	300	245	41	200	4	63-72	35-44	22-31	40	103	134	161	548	2,66	3,66	0,31	0,02	410X439X76
	2	404	400	345	41	200	4	63-72	35-44	22-31	54	140	183	219	747	3,20	4,31	0,34	0,02	510X439X76
	2	404	500	445	41	200	4	63-72	35-44	22-31	69	179	233	280	955	3,74	4,96	0,37	0,03	610X439X76
	2	404	600	545	41	200	4	63-72	35-44	22-31	85	220	286	343	1171	4,28	5,59	0,40	0,03	710X439X76
	2	404	700	645	41	200	4	63-72	35-44	22-31	97	251	327	392	1336	4,82	6,25	0,43	0,03	810X439X76
	2	404	800	745	41	200	4	63-72	35-44	22-31	109	281	365	438	1494	5,36	6,90	0,46	0,04	910X439X76
	2	404	900	845	41	200	4	63-72	35-44	22-31	120	309	402	482	1645	5,90	7,55	0,48	0,04	1010X439X76
	2	404	1000	945	41	200	4	63-72	35-44	22-31	130	336	437	524	1788	6,44	8,21	0,51	0,04	1110X439X76
	2	404	1200	1145	41	200	4	63-72	35-44	22-31	149	386	502	602	2053	7,52	9,49	0,57	0,05	1310X439X76
	2	404	1400	1345	41	200	4	63-72	35-44	22-31	171	443	576	691	2357	8,60	10,79	0,63	0,06	1510X439X76
2	404	1600	1545	41	200	4	63-72	35-44	22-31	197	509	661	794	2707	9,67	12,09	0,68	0,06	1710X439X76	
2	404	1800	1745	41	200	4	63-72	35-44	22-31	226	584	759	911	3108	10,75	13,50	0,74	0,07	1910X439X76	

Model	Section	Width W (mm)	Height H (mm)	A Axis Dimension (mm)	D Depth of the Product (mm)	F Tube Width (mm)	E Gap Between Two Tubes (mm)	K Wall to Radiator Front (mm)	L Wall to Radiator Axis Center (mm)	M Wall to Radiator Back (mm)	Heat Output $\Delta T=30\text{ }^{\circ}\text{C}$ (Watt)	Heat Output $\Delta T=50\text{ }^{\circ}\text{C}$ (Watt)	Heat Output $\Delta T=60\text{ }^{\circ}\text{C}$ (Watt)	Heat Output $\Delta T=70\text{ }^{\circ}\text{C}$ (Watt)	BTU/h	Net Weight (kg)	Gross Weight (kg)	Water Volume (l)	Package Volume (m ³)	Package Dimensions H x W x D (mm)
Nish 1832	9	1832	300	245	41	200	4	63-72	35-44	22-31	179	464	603	724	2467	11,99	14,64	1,40	0,06	410X1867X76
	9	1832	400	345	41	200	4	63-72	35-44	22-31	245	632	822	986	3362	14,42	17,43	1,52	0,08	510X1867X76
	9	1832	500	445	41	200	4	63-72	35-44	22-31	313	808	1050	1260	4296	16,85	20,22	1,65	0,09	610X1867X76
	9	1832	600	545	41	200	4	63-72	35-44	22-31	383	990	1288	1545	5269	19,28	23,01	1,78	0,11	710X1867X76
	9	1832	700	645	41	200	4	63-72	35-44	22-31	438	1131	1470	1764	6014	21,71	25,82	1,91	0,12	810X1867X76
	9	1832	800	745	41	200	4	63-72	35-44	22-31	489	1264	1643	1972	6725	24,14	28,62	2,04	0,13	910X1867X76
	9	1832	900	845	41	200	4	63-72	35-44	22-31	538	1391	1809	2171	7402	26,57	31,40	2,17	0,15	1010X1867X76
	9	1832	1000	945	41	200	4	63-72	35-44	22-31	585	1513	1966	2360	8047	29,00	33,80	2,30	0,16	1110X1867X76