


Connection Types



Model	Section	Width W (mm)	Height H (mm)	A Axis Dimension (mm)	D Depth of the Product (mm)	F Tube Width (mm)	E Gap Between Two Tubes (mm)	K Wall to Radiator Front (mm)	L Wall to Radiator Axis Center (mm)	M Wall to Radiator Back (mm)	Heat Output $\Delta T=30^\circ\text{C}$ (Watt)	Heat Output $\Delta T=50^\circ\text{C}$ (Watt)	Heat Output $\Delta T=60^\circ\text{C}$ (Watt)	Heat Output $\Delta T=70^\circ\text{C}$ (Watt)	BTU/h	Net Weight (kg)	Gross Weight (kg)	Water Volume (l)	Package Volume (m <sup>3</sup> )	Package Dimensions H x W x D (mm)
Sosa 200	1	200	1600	1545	43	200	4	65-74	36-45	21-30	98	254	331	397	1353	6,41	6,55	0,34	0,04	1690X235X78
	1	200	1800	1745	43	200	4	65-74	36-45	21-30	113	292	380	456	1554	7,16	7,24	0,37	0,04	1890X235X78
Sosa 404	2	404	300	245	43	200	4	65-74	36-45	21-30	40	103	134	161	548	3,18	3,72	0,31	0,02	390X439X78
	2	404	400	345	43	200	4	65-74	36-45	21-30	54	140	183	219	747	3,88	4,38	0,34	0,02	490X439X78
	2	404	500	445	43	200	4	65-74	36-45	21-30	69	179	233	280	955	4,63	5,03	0,37	0,03	590X439X78
	2	404	600	545	43	200	4	65-74	36-45	21-30	85	220	286	343	1171	5,33	5,67	0,40	0,03	690X439X78
	2	404	700	645	43	200	4	65-74	36-45	21-30	97	251	327	392	1336	6,06	6,32	0,43	0,03	790X439X78
	2	404	800	745	43	200	4	65-74	36-45	21-30	109	281	365	438	1494	6,75	6,97	0,46	0,04	890X439X78
	2	404	900	845	43	200	4	65-74	36-45	21-30	120	309	402	482	1645	7,51	7,62	0,48	0,04	990X439X78
	2	404	1000	945	43	200	4	65-74	36-45	21-30	130	336	437	524	1788	8,20	8,27	0,51	0,04	1090X439X78
	2	404	1200	1145	43	200	4	65-74	36-45	21-30	149	386	502	602	2053	9,68	9,56	0,57	0,05	1290X439X78
	2	404	1400	1345	43	200	4	65-74	36-45	21-30	171	443	576	691	2357	11,11	10,87	0,63	0,06	1490X439X78
	2	404	1600	1545	43	200	4	65-74	36-45	21-30	197	509	661	794	2707	12,55	12,14	0,68	0,06	1690X439X78
	2	404	1800	1745	43	200	4	65-74	36-45	21-30	226	584	759	911	3108	13,97	13,44	0,74	0,07	1890X439X78

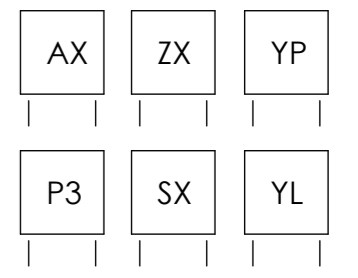

Model	Section	Width W (mm)	Height H (mm)	A Axis Dimension (mm)	D Depth of the Product (mm)	F Tube Width (mm)	E Gap Between Two Tubes (mm)	K Wall to Radiator Front (mm)	L Wall to Radiator Axis Center (mm)	M Wall to Radiator Back (mm)	Heat Output $\Delta T=30\text{ }^{\circ}\text{C}$ (Watt)	Heat Output $\Delta T=50\text{ }^{\circ}\text{C}$ (Watt)	Heat Output $\Delta T=60\text{ }^{\circ}\text{C}$ (Watt)	Heat Output $\Delta T=70\text{ }^{\circ}\text{C}$ (Watt)	BTU/h	Net Weight (kg)	Gross Weight (kg)	Water Volume (l)	Package Volume (m <sup>3</sup> )	Package Dimensions H x W x D (mm)
<b>Sosa 1832</b>	9	1832	300	245	43	200	4	65-74	36-45	21-30	179	464	603	724	2467	14,01	14,05	1,40	0,06	390X1867X78
	9	1832	400	345	43	200	4	65-74	36-45	21-30	245	632	822	986	3362	17,18	16,84	1,52	0,08	490X1867X78
	9	1832	500	445	43	200	4	65-74	36-45	21-30	313	808	1050	1260	4296	20,38	19,64	1,65	0,09	590X1867X78
	9	1832	600	545	43	200	4	65-74	36-45	21-30	383	990	1288	1545	5269	23,52	22,43	1,78	0,11	690X1867X78
	9	1832	700	645	43	200	4	65-74	36-45	21-30	438	1131	1470	1764	6014	26,69	25,23	1,91	0,12	790X1867X78
	9	1832	800	745	43	200	4	65-74	36-45	21-30	489	1264	1643	1972	6725	29,89	28,03	2,04	0,13	890X1867X78
	9	1832	900	845	43	200	4	65-74	36-45	21-30	538	1391	1809	2171	7402	33,06	30,82	2,17	0,15	990X1867X78
9	1832	1000	945	43	200	4	65-74	36-45	21-30	585	1513	1966	2360	8047	36,26	33,61	2,30	0,16	1090X1867X78	