


Connection Types

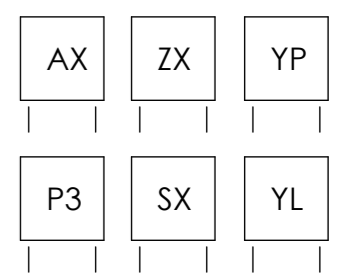

Model	Section	Width W (mm)	Height H (mm)	A Axis Dimension (mm)	D Depth of the Product (mm)	F Tube Width (mm)	E Gap Between Two Tubes (mm)	K Wall to Radiator Front (mm)	L Wall to Radiator Axis Center (mm)	M Wall to Radiator Back (mm)	Heat Output $\Delta T=30^{\circ}\text{C}$ (Watt)	Heat Output $\Delta T=50^{\circ}\text{C}$ (Watt)	Heat Output $\Delta T=60^{\circ}\text{C}$ (Watt)	Heat Output $\Delta T=70^{\circ}\text{C}$ (Watt)	BTU/h	Net Weight (kg)	Gross Weight (kg)	Water Volume (l)	Package Volume (m <sup>3</sup> )	Package Dimensions H x W x D (mm)
Wei Double 200	1	200	1600	1545	56	200	4	81-90	53-62	26-35	104	268	348	418	1424	6,52	8,15	0,34	0,04	1690X235X91
	1	200	1800	1745	56	200	4	81-90	53-62	26-35	119	307	400	480	1636	7,28	9,17	0,37	0,05	1890X235X91
Wei Double 404	2	404	300	245	56	200	4	81-90	53-62	26-35	42	108	141	169	577	3,22	4,17	0,31	0,02	390X439X91
	2	404	400	345	56	200	4	81-90	53-62	26-35	57	148	192	231	787	3,97	5,03	0,34	0,02	490X439X91
	2	404	500	445	56	200	4	81-90	53-62	26-35	73	189	246	295	1005	4,73	5,91	0,37	0,03	590X439X91
	2	404	600	545	56	200	4	81-90	53-62	26-35	90	232	301	361	1232	5,48	6,76	0,40	0,03	690X439X91
	2	404	700	645	56	200	4	81-90	53-62	26-35	102	264	344	413	1407	6,24	7,63	0,43	0,04	790X439X91
	2	404	800	745	56	200	4	81-90	53-62	26-35	114	296	384	461	1573	7,00	8,50	0,46	0,04	890X439X91
	2	404	900	845	56	200	4	81-90	53-62	26-35	126	325	423	508	1731	7,75	9,37	0,48	0,04	990X439X91
	2	404	1000	945	56	200	4	81-90	53-62	26-35	137	354	460	552	1882	8,51	10,24	0,51	0,05	1090X439X91
	2	404	1200	1145	56	200	4	81-90	53-62	26-35	157	406	528	634	2161	10,02	11,96	0,57	0,06	1290X439X91
	2	404	1400	1345	56	200	4	81-90	53-62	26-35	181	466	606	728	2481	11,53	13,70	0,63	0,06	1490X439X91
2	404	1600	1545	56	200	4	81-90	53-62	26-35	207	536	696	835	2849	13,03	15,42	0,68	0,07	1690X439X91	
2	404	1800	1745	56	200	4	81-90	53-62	26-35	238	615	799	959	3271	14,55	17,37	0,74	0,08	1890X439X91	

Model	Section	Width W (mm)	Height H (mm)	A Axis Dimension (mm)	D Depth of the Product (mm)	F Tube Width (mm)	E Gap Between Two Tubes (mm)	K Wall to Radiator Front (mm)	L Wall to Radiator Axis Center (mm)	M Wall to Radiator Back (mm)	Heat Output $\Delta T=30\text{ }^{\circ}\text{C}$ (Watt)	Heat Output $\Delta T=50\text{ }^{\circ}\text{C}$ (Watt)	Heat Output $\Delta T=60\text{ }^{\circ}\text{C}$ (Watt)	Heat Output $\Delta T=70\text{ }^{\circ}\text{C}$ (Watt)	BTU/h	Net Weight (kg)	Gross Weight (kg)	Water Volume (l)	Package Volume (m <sup>3</sup> )	Package Dimensions H x W x D (mm)
Wei Double 608	3	608	300	245	56	200	4	81-90	53-62	26-35	63	163	212	254	866	4,83	6,18	0,47	0,03	390X643X91
	3	608	400	345	56	200	4	81-90	53-62	26-35	86	222	288	346	1180	5,96	7,45	0,51	0,03	490X643X91
	3	608	500	445	56	200	4	81-90	53-62	26-35	110	283	368	442	1507	7,09	8,74	0,55	0,04	590X643X91
	3	608	600	545	56	200	4	81-90	53-62	26-35	134	348	452	542	1849	8,23	10,02	0,60	0,05	690X643X91
	3	608	700	645	56	200	4	81-90	53-62	26-35	154	397	516	619	2110	9,36	11,30	0,64	0,05	790X643X91
	3	608	800	745	56	200	4	81-90	53-62	26-35	172	444	577	692	2360	10,50	12,58	0,68	0,06	890X643X91
	3	608	900	845	56	200	4	81-90	53-62	26-35	189	488	635	762	2597	11,63	13,86	0,72	0,06	990X643X91
	3	608	1000	945	56	200	4	81-90	53-62	26-35	205	531	690	828	2823	12,76	15,14	0,77	0,07	1090X643X91
	3	608	1200	1145	56	200	4	81-90	53-62	26-35	236	609	792	951	3242	15,03	17,70	0,85	0,08	1290X643X91
	3	608	1400	1345	56	200	4	81-90	53-62	26-35	271	700	910	1092	3722	17,30	20,28	0,94	0,09	1490X643X91
3	608	1600	1545	56	200	4	81-90	53-62	26-35	311	803	1044	1253	4273	19,55	22,81	1,02	0,10	1690X643X91	
3	608	1800	1745	56	200	4	81-90	53-62	26-35	357	922	1199	1439	4907	21,82	25,32	1,11	0,12	1890X643X91	
Wei Double 812	4	812	300	245	56	200	4	81-90	53-62	26-35	84	217	282	339	1154	6,44	7,92	0,62	0,04	390X847X91
	4	812	400	345	56	200	4	81-90	53-62	26-35	114	296	384	461	1573	7,95	9,62	0,68	0,04	490X847X91
	4	812	500	445	56	200	4	81-90	53-62	26-35	146	378	491	589	2010	9,46	11,31	0,74	0,05	590X847X91
	4	812	600	545	56	200	4	81-90	53-62	26-35	179	463	602	723	2465	10,97	12,99	0,79	0,06	690X847X91
	4	812	700	645	56	200	4	81-90	53-62	26-35	205	529	688	825	2814	12,49	14,71	0,85	0,07	790X847X91
	4	812	800	745	56	200	4	81-90	53-62	26-35	229	591	769	923	3146	14,00	16,39	0,91	0,07	890X847X91
	4	812	900	845	56	200	4	81-90	53-62	26-35	252	651	846	1016	3463	15,51	18,09	0,97	0,08	990X847X91
	4	812	1000	945	56	200	4	81-90	53-62	26-35	274	708	920	1104	3765	17,02	19,79	1,02	0,09	1090X847X91
	4	812	1200	1145	56	200	4	81-90	53-62	26-35	314	813	1056	1268	4322	20,05	23,19	1,14	0,10	1290X847X91
	4	812	1400	1345	56	200	4	81-90	53-62	26-35	361	933	1213	1455	4963	23,07	26,57	1,25	0,12	1490X847X91
4	812	1600	1545	56	200	4	81-90	53-62	26-35	415	1071	1392	1671	5698	26,06	29,93	1,37	0,14	1690X847X91	
4	812	1800	1745	56	200	4	81-90	53-62	26-35	476	1230	1599	1919	6542	29,09	33,33	1,48	0,15	1890X847X91	
Wei Double 1016	5	1016	300	245	56	200	4	81-90	53-62	26-35	105	271	353	423	1443	8,05	9,72	0,78	0,04	390X1051X91
	5	1016	400	345	56	200	4	81-90	53-62	26-35	143	370	481	577	1966	9,94	11,84	0,85	0,05	490X1051X91
	5	1016	500	445	56	200	4	81-90	53-62	26-35	183	472	614	737	2512	11,83	13,95	0,92	0,06	590X1051X91
	5	1016	600	545	56	200	4	81-90	53-62	26-35	224	579	753	904	3081	13,72	16,05	0,99	0,07	690X1051X91
	5	1016	700	645	56	200	4	81-90	53-62	26-35	256	661	859	1031	3517	15,61	18,16	1,06	0,08	790X1051X91
	5	1016	800	745	56	200	4	81-90	53-62	26-35	286	739	961	1153	3933	17,50	20,27	1,13	0,09	890X1051X91
	5	1016	900	845	56	200	4	81-90	53-62	26-35	315	814	1058	1269	4329	19,39	22,38	1,21	0,10	990X1051X91
	5	1016	1000	945	56	200	4	81-90	53-62	26-35	342	885	1150	1380	4706	21,28	24,49	1,28	0,11	1090X1051X91
	5	1016	1200	1145	56	200	4	81-90	53-62	26-35	393	1016	1320	1584	5403	25,06	28,71	1,42	0,13	1290X1051X91
	5	1016	1400	1345	56	200	4	81-90	53-62	26-35	451	1166	1516	1819	6203	28,84	32,94	1,56	0,15	1490X1051X91
5	1016	1600	1545	56	200	4	81-90	53-62	26-35	518	1339	1741	2089	7122	32,58	37,12	1,71	0,17	1690X1051X91	
5	1016	1800	1745	56	200	4	81-90	53-62	26-35	595	1537	1998	2398	8178	36,36	41,32	1,85	0,19	1890X1051X91	
Wei Double 1220	6	1220	300	245	56	200	4	81-90	53-62	26-35	126	325	423	508	1731	9,65	11,51	0,93	0,05	390X1255X91
	6	1220	400	345	56	200	4	81-90	53-62	26-35	172	444	577	692	2360	11,92	14,03	1,02	0,06	490X1255X91
	6	1220	500	445	56	200	4	81-90	53-62	26-35	219	567	737	884	3015	14,19	16,55	1,10	0,07	590X1255X91
	6	1220	600	545	56	200	4	81-90	53-62	26-35	269	695	904	1084	3697	16,45	19,07	1,19	0,08	690X1255X91
	6	1220	700	645	56	200	4	81-90	53-62	26-35	307	793	1031	1238	4220	18,72	21,61	1,27	0,10	790X1255X91
	6	1220	800	745	56	200	4	81-90	53-62	26-35	343	887	1153	1384	4719	20,99	24,13	1,36	0,11	890X1255X91
	6	1220	900	845	56	200	4	81-90	53-62	26-35	378	976	1269	1523	5194	23,26	26,66	1,45	0,12	990X1255X91
	6	1220	1000	945	56	200	4	81-90	53-62	26-35	411	1062	1380	1656	5647	25,53	29,18	1,53	0,13	1090X1255X91
	6	1220	1200	1145	56	200	4	81-90	53-62	26-35	472	1219	1584	1901	6483	30,06	34,23	1,70	0,15	1290X1255X91
	6	1220	1400	1345	56	200	4	81-90	53-62	26-35	542	1399	1819	2183	7444	34,60	39,29	1,88	0,18	1490X1255X91
Wei Double 1424	7	1424	300	245	56	200	4	81-90	53-62	26-35	147	380	494	592	2020	11,26	13,30	1,09	0,06	390X1459X91
	7	1424	400	345	56	200	4	81-90	53-62	26-35	200	517	673	807	2753	13,91	16,24	1,19	0,07	490X1459X91
	7	1424	500	445	56	200	4	81-90	53-62	26-35	256	661	859	1031	3517	16,55	19,18	1,29	0,08	590X1459X91
	7	1424	600	545	56	200	4	81-90	53-62	26-35	314	811	1054	1265	4314	19,20	22,12	1,39	0,10	690X1459X91
	7	1424	700	645	56	200	4	81-90	53-62	26-35	358	926	1203	1444	4924	21,84	25,05	1,49	0,11	790X1459X91
	7	1424	800	745	56	200	4	81-90	53-62	26-35	401	1035	1345	1615	5506	24,49	27,99	1,59	0,12	890X1459X91
	7	1424	900	845	56	200	4	81-90	53-62	26-35	441	1139	1481	1777	6060	27,14	30,94	1,69	0,14	990X1459X91
	7	1424	1000	945	56	200	4	81-90	53-62	26-35	479	1238	1610	1932	6588	29,78	33,87	1,79	0,15	1090X1459X91
	7	1424	1200	1145	56	200	4	81-90	53-62	26-35	550	1422	1848	2218	7564	35,07	39,76	1,99	0,18	1290X1459X91
	7	1424	1400	1345	56	200	4	81-90	53-62	26-35	632	1633	2122	2547	8685	40,37	45,64	2,19	0,20	1490X1459X91

Model	Section	Width W (mm)	Height H (mm)	A Axis Dimension (mm)	D Depth of the Product (mm)	F Tube Width (mm)	E Gap Between Two Tubes (mm)	K Wall to Radiator Front (mm)	L Wall to Radiator Axis Center (mm)	M Wall to Radiator Back (mm)	Heat Output $\Delta T=30^{\circ}\text{C}$ (Watt)	Heat Output $\Delta T=50^{\circ}\text{C}$ (Watt)	Heat Output $\Delta T=60^{\circ}\text{C}$ (Watt)	Heat Output $\Delta T=70^{\circ}\text{C}$ (Watt)	BTU/h	Net Weight (kg)	Gross Weight (kg)	Water Volume (l)	Package Volume (m <sup>3</sup> )	Package Dimensions H x W x D (mm)
Wei Double 1628	8	1628	300	245	56	200	4	81-90	53-62	26-35	168	434	564	677	2309	12,87	15,09	1,24	0,06	390X1663X91
	8	1628	400	345	56	200	4	81-90	53-62	26-35	229	591	769	923	3146	15,90	18,46	1,36	0,08	490X1663X91
	8	1628	500	445	56	200	4	81-90	53-62	26-35	292	756	982	1179	4019	18,92	21,81	1,47	0,09	590X1663X91
	8	1628	600	545	56	200	4	81-90	53-62	26-35	359	927	1205	1446	4930	21,94	25,15	1,58	0,11	690X1663X91
	8	1628	700	645	56	200	4	81-90	53-62	26-35	409	1058	1375	1650	5627	24,97	28,51	1,70	0,12	790X1663X91
	8	1628	800	745	56	200	4	81-90	53-62	26-35	458	1183	1538	1845	6292	27,99	31,87	1,81	0,14	890X1663X91
	8	1628	900	845	56	200	4	81-90	53-62	26-35	504	1302	1693	2031	6926	31,02	35,23	1,93	0,15	990X1663X91
Wei Double 1832	9	1832	300	245	56	200	4	81-90	53-62	26-35	189	488	635	762	2597	14,48	16,89	1,40	0,07	390X1867X91
	9	1832	400	345	56	200	4	81-90	53-62	26-35	257	665	865	1038	3539	17,88	20,65	1,52	0,09	490X1867X91
	9	1832	500	445	56	200	4	81-90	53-62	26-35	329	850	1105	1326	4522	21,29	24,43	1,65	0,11	590X1867X91
	9	1832	600	545	56	200	4	81-90	53-62	26-35	403	1043	1355	1626	5546	24,69	28,19	1,78	0,12	690X1867X91
	9	1832	700	645	56	200	4	81-90	53-62	26-35	461	1190	1547	1856	6331	28,09	31,97	1,91	0,14	790X1867X91
	9	1832	800	745	56	200	4	81-90	53-62	26-35	515	1331	1730	2076	7079	31,49	35,74	2,04	0,16	890X1867X91
	9	1832	900	845	56	200	4	81-90	53-62	26-35	567	1465	1904	2285	7791	34,89	39,50	2,17	0,17	990X1867X91
	9	1832	1000	945	56	200	4	81-90	53-62	26-35	616	1592	2070	2484	8470	38,30	43,06	2,30	0,19	1090X1867X91